
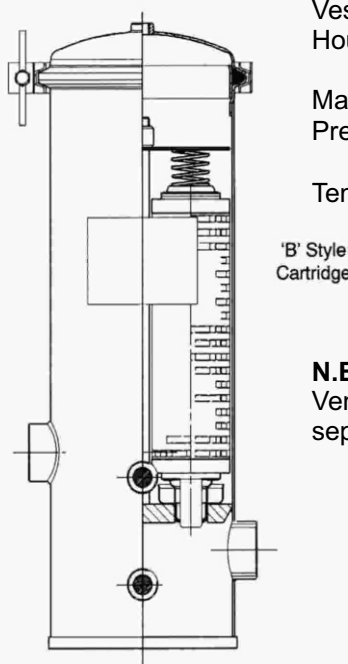


PVI- 031 to 054

INDUSTRIAL LIQUID FILTER VESSEL

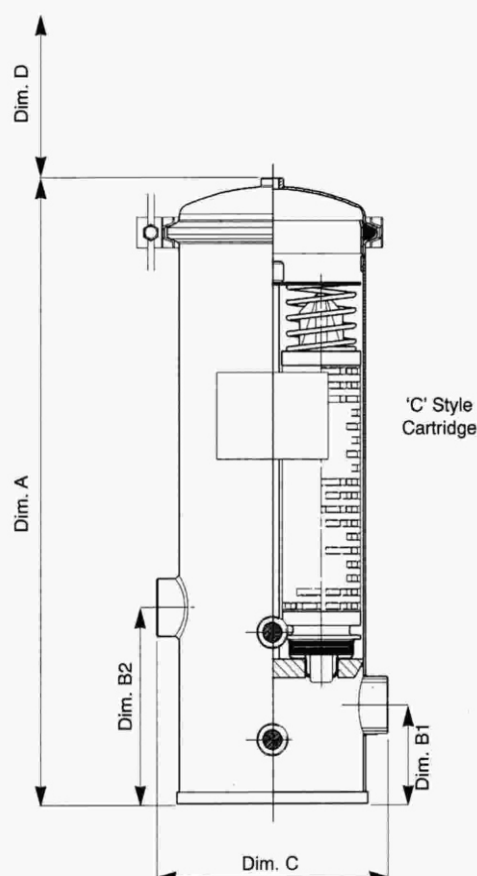

DESIGN DATA

Material : 304 Stainless Steel
 External Finish : Mechanically polished
 Internal Finish : Electropolished
 Vessel Closure : V Band Clamp
 Housing seals : Silicon

Maximum Operating Conditions :
 Pressure : 8 Round = 8.5 kg/cm²
 12 Round = 12 kg/cm²
 Temperature : 100 °C

N.B.
 Vent/Drain valves must be ordered separately.

Vessel Code	No.&Size of Cartridge Fitment	Connections			Dimensions (mm)					Approx. Weight (kgs)
		Inlet / Outlet	Vent	Drain	A	B1	B2	C	D	
PVI-031-CBE	3x250 (10")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	470	85	170	200	250	12
PVI-032-CBE	3x500 (20")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	820	85	170	200	500	14
PVI-033-CBE	3x750 (30")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	1070	85	170	200	750	16
PVI-051-CBE	5x250 (10")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	470	100	200	236	250	15
PVI-052-CBE	5x500 (20")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	820	100	200	236	500	17
PVI-053-CBE	5x750 (30")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	1070	100	200	236	750	22
PVI-054-CBE	5x1000 (40")	50mm (2") BSPP	6mm (1/4") BSP	15mm (1/2") BSP	1320	100	200	236	1000	22

ProAir

Shah Pneumatics

28-30, Navketan Industrial Estate
 Mahakali Caves Road, Andheri (East),
 Mumbai 400 093 INDIA
 Tel : +91-22-66951090
 Fax : +91-22-26875317
 email : shahpneu@bom3.vsnl.net.in
 website : www.shah-pneumatics.com